

# P 60/50

P Series

**G9F13011**

## Technical Data

		Tolerance
Bottom (A)	60 mm	± 1 mm
Top (B)	64.4 mm	± 1 mm
Height (C)	50 mm	± 1 mm
Side wall paper basis weight	75 g/m <sup>2</sup>	± 5 %
Bottom paper basis weight	135 g/m <sup>2</sup>	± 5 %
Mold weight	1.35 g	± 5 %
Heat resistance	390° F max	




## Characteristics

Side wall material	Pure unbleached paper pulp, highly calendered.
Bottom Material	Single face "F" flute corrugate created from two sheets of 60 GSM pure unbleached paper, highly calendered. Smooth face creates the interior surface of the mold. Exterior surface is unprinted.
Printing	Gold flower design on brown background.
Ink	Gold PMS 872 C, Brown PMS 504 C, resistant to heat, oil and alcohol up to recommended max baking temp of 390 degrees F.
Glue	Vinyl acetate - water based. Used to attach side wall to base of mold.
Starch	Maize (corn based) used in the corrugation process.
FDA	Baking mold is manufactured in compliance with 21 CFR 176.170 and 176.180.
Kosher	Certified by KOF-K Supervision of Teaneck, New Jersey.
Country of origin	Italy

Additional specification documents available upon request.

## Packaging and Storage

Case	16 in x 12 in x 12 in
Cube	1.333 ft <sup>3</sup>
Case weight	Gross 10.1 lbs. Net 9.1 lbs.
Pieces/case	3000 pcs. (100 pcs. * 30 rows)
Pallet	56 boxes at 91" high
Tie/high	8 boxes per 7 levels
Pieces/pallet	168,000
Box Label	Item code, description, quantity, production number, production date, and operator.
Storage	Dry conditions. Three year shelf life.
GTIN-14	18051768033099

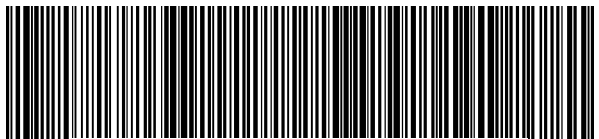

(01)18051768033099(10)123456(15)991231(422)380(91)003000

## Prepared      Approved      Date      Revision      Modifications

*C. Bruseghini*  
Quality Manager  
C. Bruseghini



10/10/2017

7

Revision 7: General modifications.

# P 60/50

P Series


G9F13011

## Technical Data

Bottom (A)	60 mm	Tolerance ± 1 mm
Top (B)	64.4 mm	± 1 mm
Height (C)	50 mm	± 1 mm
Side wall paper basis weight	75 g/m <sup>2</sup>	± 5 %
Bottom paper basis weight	135 g/m <sup>2</sup>	± 5 %
Mold weight	1.35 g	± 5 %
Heat resistance	390° F max	



## Technical Drawing

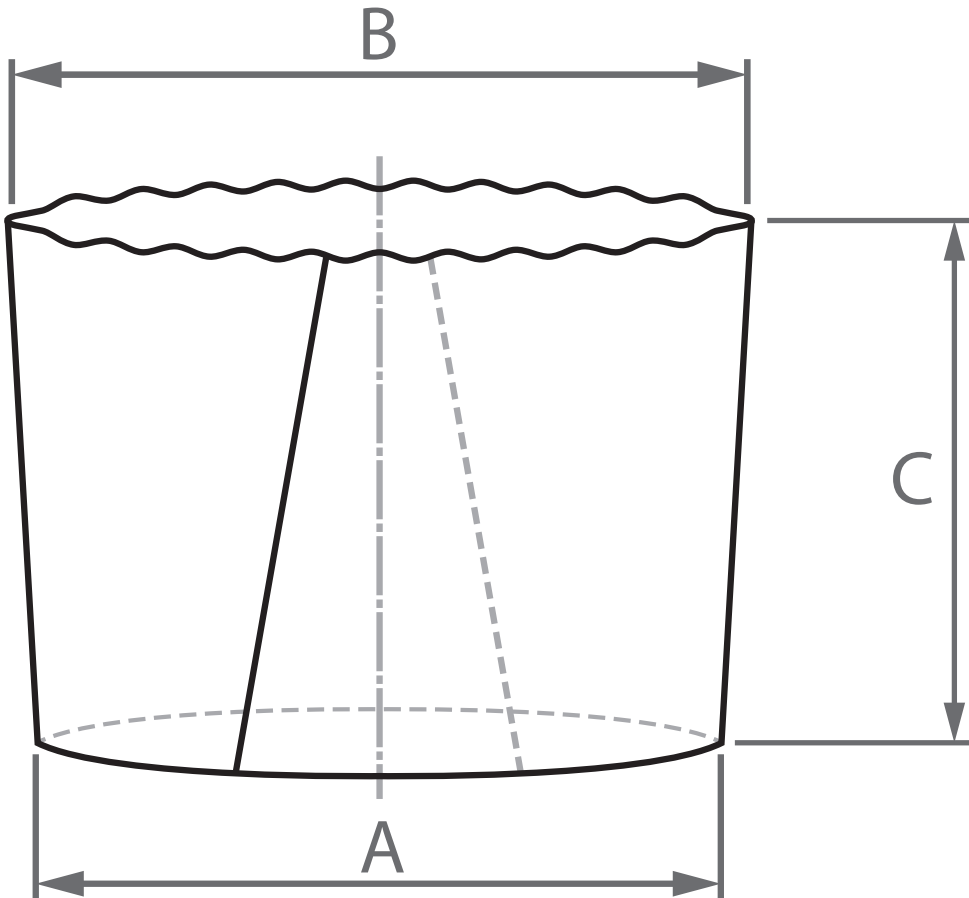

Prepared	Approved	Date	Revision	Modifications
----------	----------	------	----------	---------------

*C. Bruseghini*  
Quality Manager  
C. Bruseghini



10/10/2017

7

Revision 7: General modifications.