

# OP 100/30

G9F08244

OP Series

## Technical Data

		Tolerance
Bottom (A)	100 mm	± 1 mm
Top (B)	110 mm	± 1 mm
Inner rim (C)	116 mm	± 1 mm
Outer rim (D)	120 mm	± 1 mm
Height (H)	30 mm	± 1 mm
Mold weight	6.0 g	± 5 %
Basis weight	197 g/m <sup>2</sup>	± 5 %
Heat resistance	390° F max	




## Characteristics

Paper board stock	Pure bleached paper board printed on both sides in PMS color 469 U Brown. Ink is resistant to heat and alcohol up to the recommended maximum baking temp of 390 degrees F. Inner surface of mold is laminated with PET, 7 microns in thickness.
FDA	Baking mold is manufactured in compliance with 21 CFR 176.170 and 176.180.
Kosher	Certified by KOF-K Supervision of Teaneck, New Jersey.
Country of origin	Italy

Additional specification documents available upon request.

## Packaging and Storage

Case	19.5 in x 11 in x 10 in
Cube	1.241 ft <sup>3</sup>
Case weight	Gross 8.8 lbs. Net 7.8 lbs.
Pieces/case	560 pcs. (70 pcs. * 8 rows)
Tie/high	8 boxes per 8 levels at 86" high
Pieces/pallet	35,840
Box Label	Item code, description, quantity, production number, production date, and operator.
Storage	Dry conditions. Three year shelf life.
GTIN-14	18051768029153

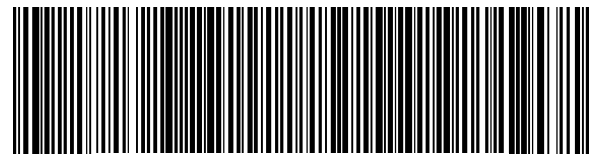

(01)18051768029153(10)123456(15)991231(422)380

Prepared



Quality Manager  
C. Bruseghini

Approved



Date

3/29/18

Revision

7

Modifications

Revision 7: General modifications.

# OP 100/30

G9F08244


OP Series

## Technical Data

		Tolerance
Bottom (A)	100 mm	± 1 mm
Top (B)	110 mm	± 1 mm
Inner rim (C)	116 mm	± 1 mm
Outer rim (D)	120 mm	± 1 mm
Height (H)	30 mm	± 1 mm
Mold weight	6.0 g	± 5 %
Basis weight	197 g/m <sup>2</sup>	± 5 %
Heat resistance	390° F max	



## Technical Drawing

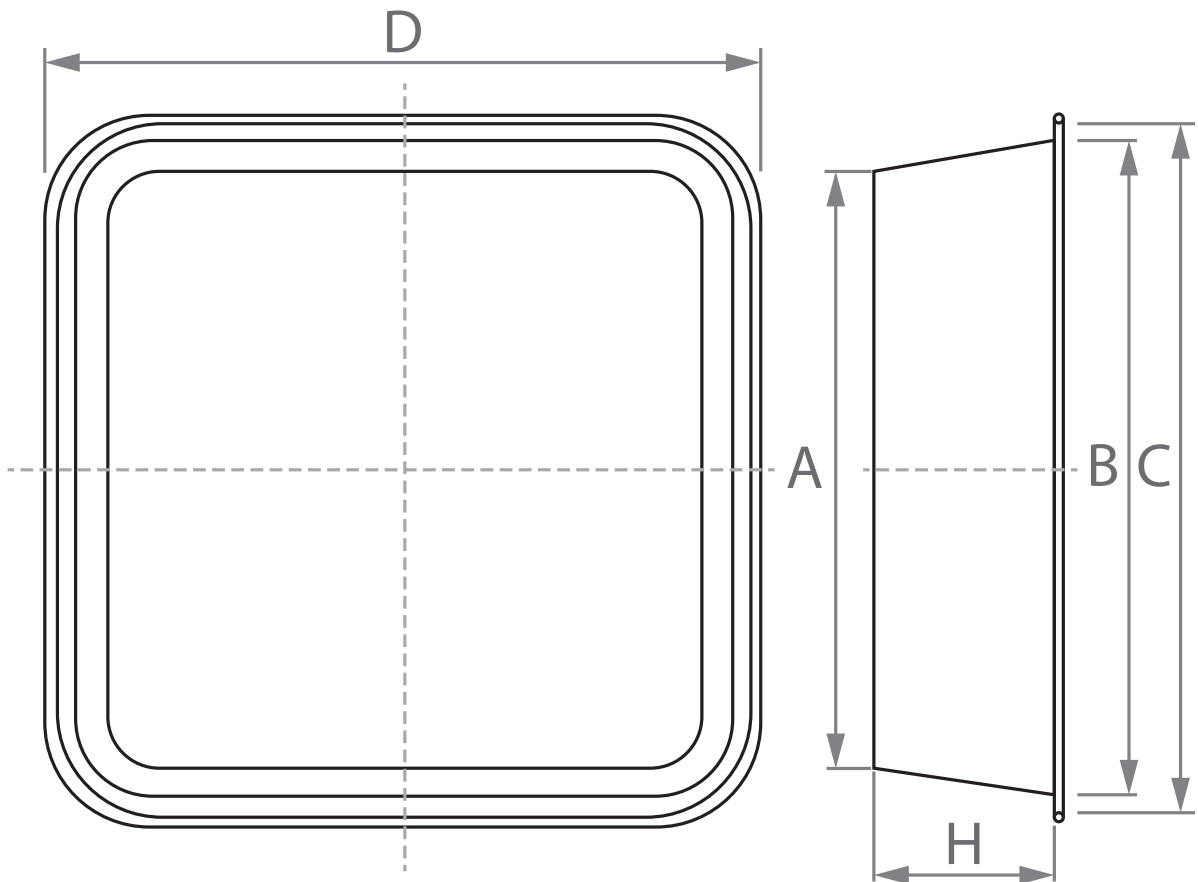

Prepared

*C. Bruseghini*

Quality Manager  
C. Bruseghini

Approved

*[Signature]*

Date

3/29/18

Revision

7

Modifications

Revision 7: General modifications.