

MBB 100

G9F17011

MBB Series

Technical Data

		Tolerance
Bottom (A)	100 mm	± 1 mm
Top (B)	106 mm	± 1 mm
Height (C)	30 mm	± 1 mm
Side basis weight	135 g/m ²	± 5 %
Bottom basis weight	138 g/m ²	± 5 %
Mold weight	3.0 g	± 5 %
Heat resistance	390° F max	



Characteristics

Side wall Material	Single face "F" flute corrugate created from two sheets of 60 GSM pure unbleached paper, highly calendered. Smooth face creates the interior surface of the mold. Exterior surface is printed.
Bottom Material	Single face "E" flute corrugate created from two sheets of pure unbleached paper, highly calendered. Interior sheet is 70 GSM and exterior sheet is 50 GSM. Smooth face creates the interior surface of the mold. Exterior surface is unprinted.
Printing	Gold flower design on brown background, exterior is printed prior to corrugation.
Ink	Gold PMS 872 C, Brown PMS 504 C, resistant to heat, oil and alcohol up to the recommended max baking temperature of 390 degrees F.
Glue	Vinyl acetate, water based, used to attach side wall to the base of mold.
Starch	Maize (corn based) used in the corrugation process of the paper.
FDA	Baking mold is manufactured in compliance with 21 CFR 176.170 and 176.180
Kosher	Certified by KOF-K Supervision of Teaneck, New Jersey.
Country of origin	Italy

Additional specification documents available upon request.

Packaging and Storage

Case	16.5 in x 13 in x 9.5 in
Cube	1.179 ft ³
Case weight	Gross 3 lbs. Net 2 lbs.
Pieces/case	300 pcs. (50 pcs. * 6 rows)
Pallet	8 boxes per 9 levels @ 88"
Pieces/pallet	21,600
Box Label	Item code, description, quantity, production number, production date, and operator.
Storage	Dry conditions. Three year shelf life.
GTIN-14	18051768034720



(01)18051768034720(10)123456(15)991231(422)380

Prepared Approved Date Revision Modifications


Quality Manager
C. Bruseghini



2/1/2018

9

Rev. 9: General Modifications

MBB 100

G9F17011


MBB Series

Technical Data

		Tolerance
Bottom (A)	100 mm	± 1 mm
Top (B)	106 mm	± 1 mm
Height (C)	30 mm	± 1 mm
Side basis weight	135 g/m ²	± 5 %
Bottom basis weight	138 g/m ²	± 5 %
Mold weight	3.0 g	± 5 %
Heat resistance	390° F max	



Technical Drawing

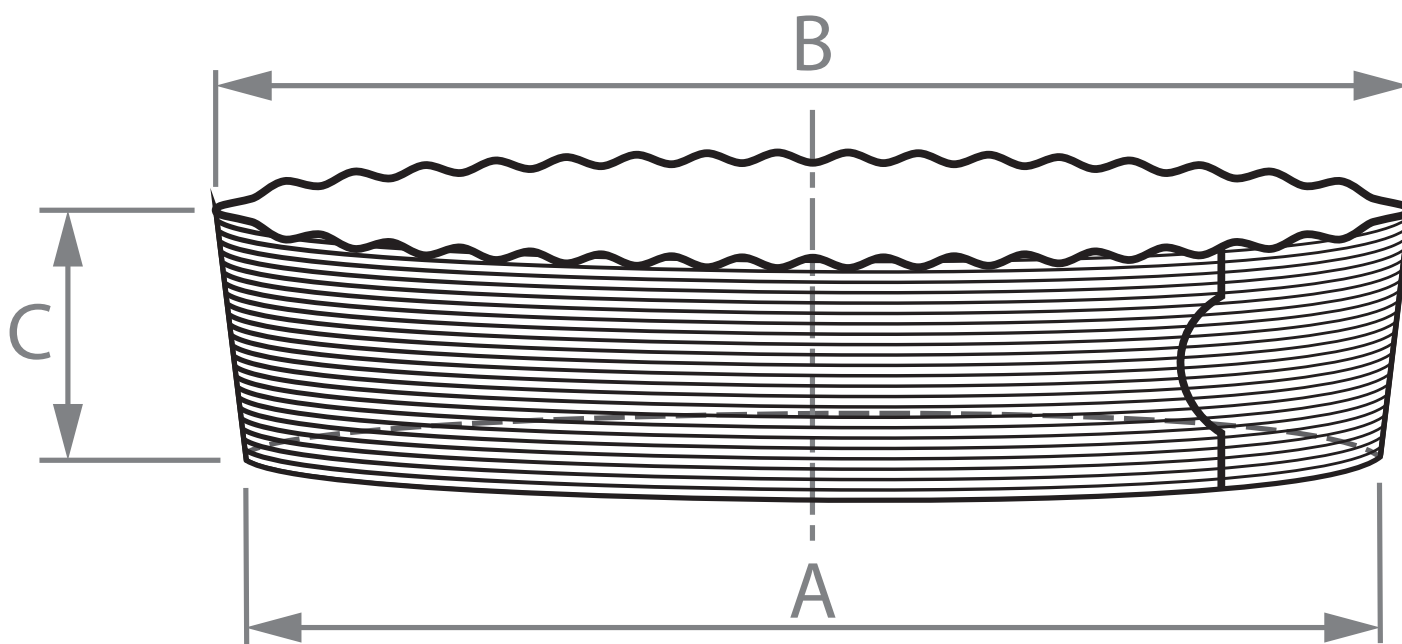

Prepared

C. Bruseghini
Quality Manager
C. Bruseghini

Approved



Date

2/1/2018

Revision

9

Modifications

Rev. 9: General Modifications